




PROJECT _____

TYPE _____

NOTES _____

QUANTITY _____

DATE _____



GENERAL

Wall _____
 Surface _____
 Gold _____
 IP20 _____
 Interior _____
 1560 lm _____
 CIE flux code: 56 84 97 50 100 _____

LED

3000 K _____
 CRI ≥ 90 _____
 L80 / 90000 h _____
 initial MacAdam ≤ 3 SDCM _____


ELECTRICAL

phase-cut dim _____
 220 - 240 V _____
 system 31 W _____
 Class 1 _____


PHYSICAL

length 900 mm _____
 width 32 mm _____
 height 80 mm _____
 2.01 kg _____

LIGHT DISTRIBUTION

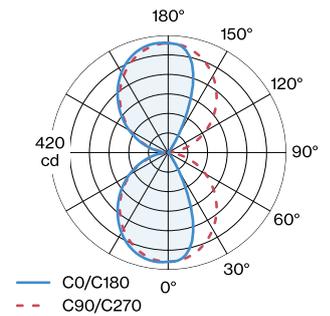

Rectangular shaped wall surface luminaire made from aluminium; Gold wet painted; brushed; PCB 3-step binning; phase-cut dim; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; 220 - 240 V; degree of protection IP20; Class 1; light source replaceable by Wever & Ducré or by a professional with explicit authorization;

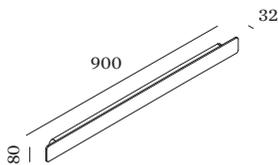



Maintenance Factor

Operating Time [h]	10.000	20.000	30.000	40.000	50.000
LLMF	0.98	0.95	0.93	0.91	0.89
LSF	1	1	1	1	1

MF	$LMF \times RSMF \times LLMF \times LSF$	RSMF ^a	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF ^a	Luminaire Maintenance Factor	LSF	Lamp Survival Factor

^aAccording to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.