


Mounting	Table
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	3,5
Energy class light source	F
Light source	COB LED
Light source included	Yes
Luminous Flux (lm)	299
Color temperature (K)	2700K
Dimmable luminaire (W)	No
Tilt angles	90
Rotation angles 2	355
CRI	≥90
Supply current	200 mA
Switch type	On/Off
Cable length	2000 mm
Structure material	Aluminium
Structure finish	Matt White
RAL/Pantone structure	RAL 9010
Shade finish	Matt White

↓ Installation instructions

↓ Energy label

↓ Photometric

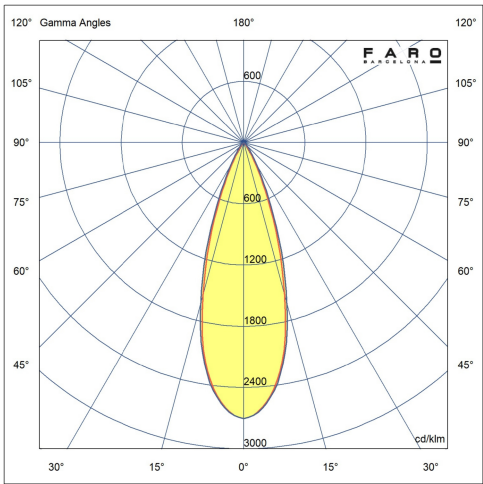

Related accessories



Tider Cable Management Accessory	
Reference	20546
Structure material	TPU



